



PPT-266 AND PPT-266H POWER PRUNERS[®]

PPT-266



PPT-266H



- 25.4 cc Professional-Grade 2-Stroke Engine for Plenty of Cutting Power
- Larger 2-stage Commercial Air Filter for Improved Filtration and Even Longer Engine Life
- Upgraded Chrome Cylinder Plating Process for Improved Longevity in Harsh Conditions
- i-30™ Technology Reduces Starting Effort by 30%
- Telescopes from 107" to 146" for Long Reach Cutting Ability
- Side-access Chain Tensioning System for Easier, Safer Chain Tightening
- Durable Gear Case Cover for Increased Longevity
- Adjustable, Automatic Oiler System Keeps Chain Properly Lubricated
- Ergonomic Handle with Rubber Over-mold for Added Comfort and Improved Handling
- Branch Extractor for Easy Removal of Troublesome Branches
- 4' Optional Extension Available
- Available with 12" Bar




5 year consumer, 2 year commercial, and 90 day rental warranty.

Visit www.echo-usa.com/5year to learn more.



PPT-266 AND PPT-266H POWER PRUNERS®

The PPT-266 and PPT-266H Power Pruners® feature a 25.4 cc professional-grade 2-stroke engine for plenty of cutting power, i-30™ technology to reduce starting effort by 30%, a larger 2-stage commercial air filter for improved filtration and even longer engine life, an upgraded chrome cylinder plating process for improved longevity in harsh conditions, a side-access chain tensioning system for easier, safer chain tightening, a durable gear case cover for increased longevity, an adjustable, automatic oiler system to keep chain properly lubricated, an ergonomic handle with rubber over-mold for added comfort and improved handling, and a branch extractor for easy removal of troublesome branches.

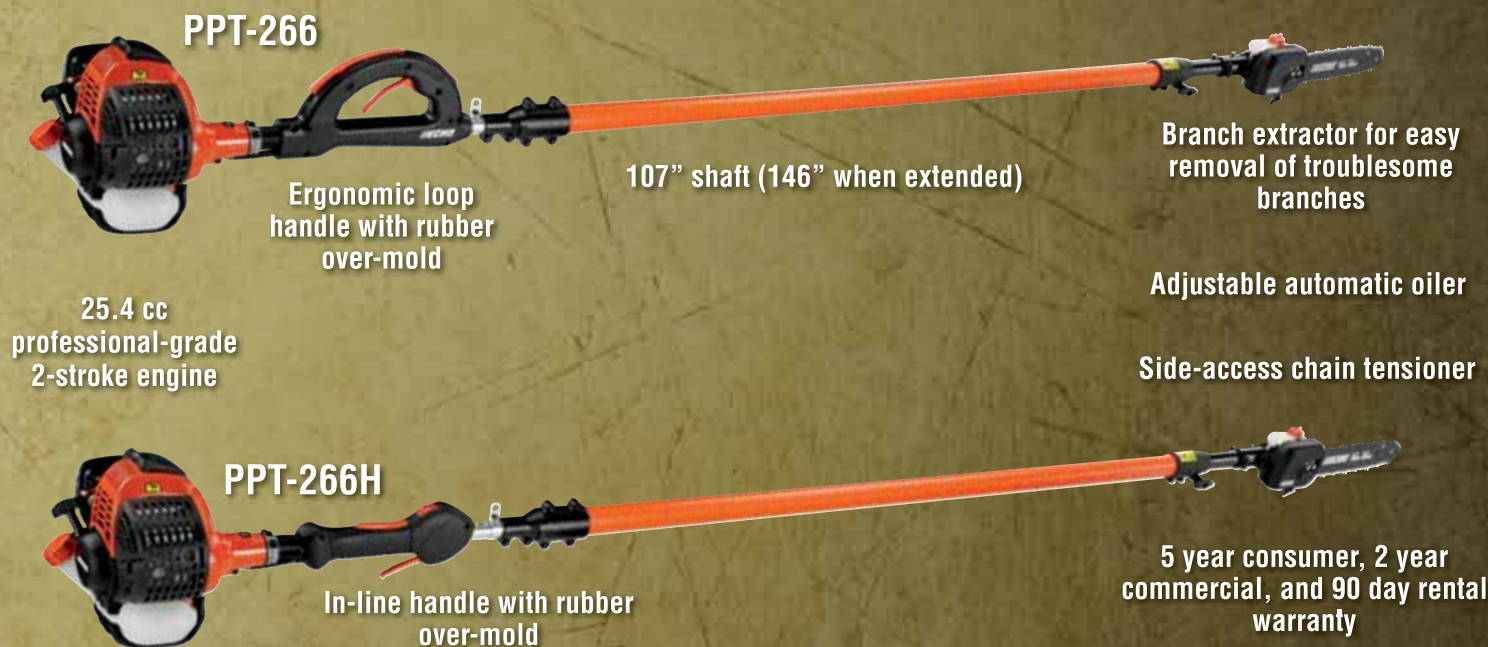

A powerful, smooth-running 25.4 cc professional-grade 2-stroke engine provides plenty of cutting power.



Ergonomic loop handle with rubber over-mold for added comfort and improved handling. (PPT-266)



In-line handle with rubber over-mold. (PPT-266H)

Model	Engine Displacement (cc)	Engine Displacement (cu in)	Carburetor (with Purge Pump)	Starting System	Fuel Capacity (fl oz)	Oil Capacity (fl oz)	Length Collapsed (in.)	Length Extended (in.)	Optional Extension (ft.)	Bar Length (in.)	Dry Weight* (lb.)
PPF-225	21.2	1.29	Rotary	Standard	14.9	7.6	93	-	3	10	13.9
PPF-280	28.1	1.71	Rotary	Standard	21.6	7.6	109	-	3	12	15.3
PPF-265S	25.4	1.55	Rotary	i-30™	16.4	7.6	77	95	4	12	15.1
PPT-266	25.4	1.55	Rotary	i-30™	16.4	7.6	107	146	4	12	17.4
PPT-266H	25.4	1.55	Rotary	i-30™	16.4	7.6	107	146	4	12	17.2
PPT-280	28.1	1.71	Rotary	Standard	21.6	7.6	113	158	4	12	19.2

*without bar and chain